



CEC DOE FC



PERFORMANCE FEATURES

- Injection-mold thermoplastic ABS housing, UL 94V-0 flame rating.
- Innovative, easy installation in minutes.
- Suitable for wall mount applications.
- Universal J-box mounting pattern.
- 120V/277VAC Dual voltage operation
- 2X12pcs Super bright 2835 0.5W LED lamp heads for emergency mode, provide more than 400Lm output.
- Built-in 3.6V2000mAh Nickel cadmium battery for minimum 90 minutes emergency operation.
- Maximum 24 hours for full recharge time.
- Test switch and charge indicator.
- UL and cULus listed.
- 0° to 40° C indoor damp location listed.
- Five years warranty for the electrical parts and housing.

ORDERING INFORMATION

Model Section		DH-EL-W	
FAMILY	HOUSING COLOR	WET LOCATION	
DH-EL-W	BLANK (WHITE)	W - UL wet rated	


ELECTRICAL INFORMATION

Model	Rated Voltage	Input Current	Input Watt	LED Type	Charging Time	EMERGENCY RUN TIME
DH-EL-W	120/277V	0.025/0.010A	2.4W	2x12pcs ultra bright 2835 SMT LED lamp	24 Hrs	90 Mins

PACKING INFORMATION

SKU #	Standard Pack	Dimension	Master Pack	Dimension
DH-EL-W	1 Pack	12.28X5.23X4.18 in	6 Pack	18.11X13.78X11.02 in

PRODUCT DIMENSIONS

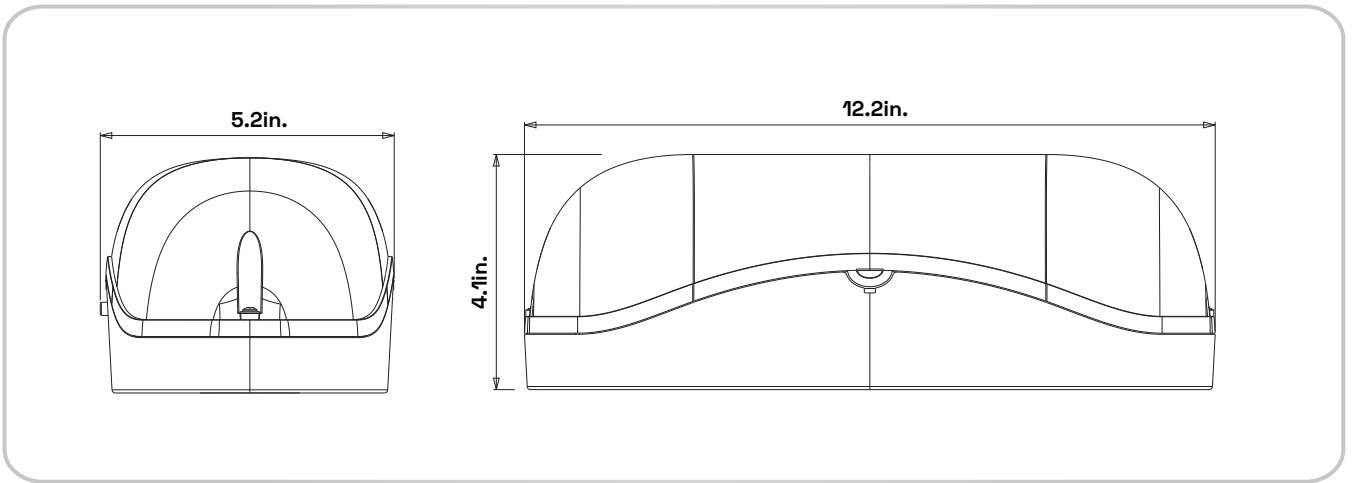

Medinah Power

Contact us: For support & assistance, please feel free to contact us below.

E-Mail: info@medinahpower.com | **Web:** www.medinahpower.com | **Ph:** +1 (844) 870-5337

