


Made in America



Lifetime Guarantee

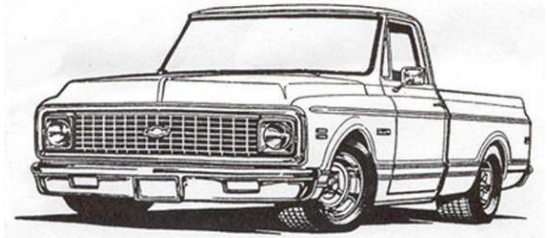

Thank you for purchasing this instrument from Intellitronix. We value our customers!

INSTALLATION GUIDE

1967-1972 Chevrolet Truck
Digital Direct Replacement Dash
Part #: BG6003



Always disconnect the battery *before* attempting any electrical work on your vehicle.*

*****Always Remove Protective Film from Your New Dash*****

Power up the unit before installing to ensure everything is working properly

KIT COMPONENTS

One (1) Circuit Board (with Speedometer, Tachometer, Voltmeter, Water Temp., Fuel Level, Oil Pressure Gauge, and Clock)

One (1) Smoked Acrylic Lens & Overlay

One (1) Temperature Sending Unit (S8013) - 1/8" NPT, 1/2" NPT Bushing

One (1) Pressure Sending Unit (S8868) - 1/8" NPT, 0-100 PSI Oil Pressure

One (1) Universal Speedometer Sensor (S9013) - 7/8" NPT Industry Standard threads

One (1) Mounting Kit

Two(2) - 10/32 x 1" screws

Two(2) #10x3/8" -Nylon spacers

Two(2) #10- Nylon washers

Two(2) -10/32 Nylock nut

Eight (8) #8-32 x 3/8in Pan Head Machine screws

Four (4) #8 x 1" Threaded Standoffs/separators

Four (4) Attachment Brackets

Step 1



Step 1 Close



Attach overlay to the front of the circuit board using 4 #8-32 X 3/8" screws

Step 2 Attach the 4 threaded stand offs to the back of the board





Step 3 Place the 2 #10-32 X 1" screws through



Step 4 Place the 1/2" Nylon spacers on the



Step 5 place the circuit board on top of the acrylic and attached using the #10 Nylock

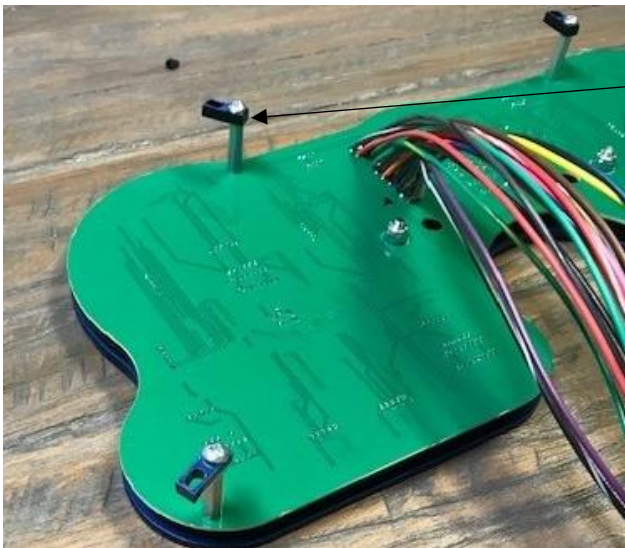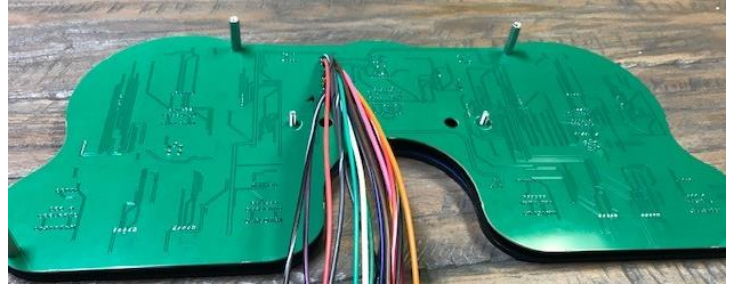

Attachment bracket with #8-32 X 3/8" screw

Step 6 Attach the black attachment brackets to the threaded stand offs using the remaining 4 #8-32 X 3/8"

NOTE: The install for the DP6003 and BG6003 are the same

Standard Wiring Colors ALL COLORS MAY NOT APPLY

Color	Purpose	Color	Purpose
Red	12Volts Battery Constant	Black	Ground
Pink	Ignition 12 volts clock	Green/Yellow	Check Engine
White	Speedometer	Green	Tachometer
Yellow	Fuel	Black/Yellow	Fuel sender Ground
Orange	Oil pressure	Black/Orange	Oil sender Ground
Blue	Water Temperature	Black/Blue	Water Temperature Ground
Grey with White	Turn Signal (right)	Grey with Black	Turn Signal (left)
Red/White	12volt to speed sender	Black/White	Ground to speed sender
Brown	High Beam	Purple	Dimmer
Tan	Brake	Brown/Yellow	Boost or 4X4
Grey with push button	Speedometer/Tachometer		
Orange/White <u>Corvette</u> board only	Oil Temperature	Red/white <u>corvette</u> board only	Ground for oil temp

WIRING INSTRUCTIONS

Note: *Automotive circuit connectors are the preferred method of connecting wires. However, you may solder if you prefer.*

Note: LS Engines or any other Computer based engine systems must use provided sensors along with the factory sensors to send the signal to the computer

Use 18 AWG or larger wire to ensure sufficient grounding and power feed

Black – Ground This is the main ground for the display system. A wire should be run from this board to the vehicle engine block for the best ground. Proper vehicle grounding is extremely important for any gauges (or electronics) to operate correctly. The engine block should have heavy ground cables to the battery, frame, and firewall. Failure to properly ground the engine block, senders, or digital dash can cause incorrect or erratic operation.

Pink – Accessory 12V Connect the power terminal to accessory +12V power from the fuse panel or vehicle wiring harness. Using a 5-amp fuse or an inline 5-amp fuse holder. This terminal should have power when the key is on or in accessory position. Use 18 AWG wire to ensure the system receives a sufficient power feed.

Blue – Water Temperature This gauge is incompatible with other sending units, so you must replace the existing water temperature sending unit with the included sender. Do not use Teflon tape or other sealer on the new sending unit's threads to avoid inaccurate readings. Connect the blue wire to the sending unit. For the best results we suggest running a new wire.

Black/Blue – Water Temperature Ground This is a ground wire for the two terminal water temp senders. **If your dash kit came with the single terminal sender this wire will go to the engine block ground.** If using the two terminal sender this will go to the black/blue wire on the sender's harness. If your kit contains a two-wire sender and your dash circuit board does not have the Black/Blue wire installed, then run this wire coming off the senders harness to the same ground that the dash board is grounded to

Oil Pressure – Orange Replace the existing oil pressure sending unit with the unit included with your gauge. The Orange wire will be wired to the S terminal on the sending unit. This gauge is incompatible with other sending units.

Orange/Black – Oil Pressure Ground Connect to the G terminal on sender

Purple - Dimmer Connect to the parking lights to dim the LEDs 50% when the headlights are on. However, ***DO NOT*** connect to the headlight rheostat control wire, or the dimming feature will not work properly and may cause damage to Unit.

Tan - Brake Connect to the parking brake wire from the dash to negative side of parking brake light switch. **NOTE:** If you are using a one wire switch you may need to switch to a two-wire switch. This wire is an optional wire some vehicles may not require

Brown – High Beam Connect the brown wire on the Dash unit to your high beam headlight circuit. This wire is powered on when the high beam is turned on.

Green/Yellow – Check Engine Connect to the Negative side of the Check Engine Light circuit. The Check Engine light will come on when using with a PCM or ECM.

Grey with White strip – Right Turn Signal 18-gauge wire is the - RIGHT turn signal

Grey with Black strip – Left Turn Signal 18-gauge wire is the – Left turn signal.

Voltage Gauge This Gauge Requires no wire hookup. Volt Gauge is built into the dash panel and is powered by the main power and ground connection of the dash. It does have an Adjuster to fine tune the voltage. Note: you will need to adjust it before fully installing the dash

Trip/Cal Button - Push button on Dash Used to easily reset your trip odometer or other speedometer functions.



Tach program Button –Push button on Dash Used to easily set the other functions of the tachometer.

Clock Setting

Press the setting button under each section for hour and minute settings.

Black/Yellow - Fuel Ground Run a new ground wire and attach to your Fuel sending unit housing to ensure proper fuel gauge operation. If the sending unit does not have sufficient ground, it will not work properly.

Yellow – Fuel The fuel gauge sending unit is not normally supplied because the display system can use the existing fuel level sending unit in the tank in most cases. If your wiring harness already has a single wire routed through the vehicle for the fuel sender, then it may be used. If using a wire from an external harness, make sure that the wire does not have power. Fuel senders reference their ground from the sender mounting plate. Connect the yellow wire to the factory sending unit.

Both switches in the **ON** position for GM 40-250

For GM 0-90 - #1 toggle is **ON**





2 toggle is **OFF**.

Both switches in the **OFF** position for VDO

For Universal/Stewart Warner

#1 toggle is **OFF**

2 toggle is **ON**.

Fuel Selector Switch Position		
Manufacturer	Switch Position	Ohm Range (Empty to Full)
GM		40-250
GM		0-90 OHM
VDO		10-180 OHM
Universal/ Stewart Warner		240-33 OHM

FUEL GAUGE TEST The most common problem with our Fuel Gauge not working is the circuit is not complete. The easiest way to test this is to use a voltmeter and test for continuity on wires going to fuel sender. With wire disconnected from Fuel Gauge check for continuity to ground. Without this the Gauge will not work.

Note: If doing a LS engine swap, pick up the tach signal wire from the ECM/ECU and then set the tach switch to 4-cylinders. You may also need to order the Intellitronix LS Engine Swap Adapter Kit for Series 1, 2 and 3 engines. The resistor in the adapter kit will help pull a stronger signal for the tachometer.

Green – Tachometer

If your vehicle has a **separate ignition coil**, connect the green wire to the **negative (-)** side of the coil – the wire that goes to the points or electronic ignition module.

To ensure that the ignition system does not interfere with any other dashboard functions, do not run the tachometer wire alongside any other sender or input wires. **Do not** use solid core spark plug wires with this dashboard system. Solid core ignition wires cause a large amount of electromagnetic and radio frequency interference which can disrupt the system's operation.

If your vehicle has a **GM HEI ignition**, connect to the terminal marked 'TACH', or, on some systems, a single white wire with a spade terminal.

If your vehicle has an **after-market ignition** – some systems will connect to the TACH output terminal.

If your vehicle has a **Computer controlled ignition** system, consult the service manual for the wire color and location.

If your vehicle has a **magneto** system, connect the tach signal wire to the negative side of the coil.

Do not connect the tach terminal to the positive (+ or high voltage) side of the ignition coil. Many tachometers, shift lights or RPM-activated switches will not read directly from a Magneto, so your installation may need a Magneto Signal Converter to function properly.

The default setting for the tachometer is for an 8-cylinder engine.

To change settings:

The display will stay in Settings Mode until it receives a signal from the ignition system. To program the unit after starting the engine, shut the engine off and turn on only to the accessory position. When in accessory mode, the settings menu will scroll through the settings menu. A light tap on the button engages the menu system.

1. Sets # of digits in RPM display, using button, display shows: (hundreds) 8800, (tens) 8880, and (ones) 8888.
2. Sets # of cylinders using button, display shows: 1cy, 2cy, etc.
3. Sets first digit on max RPM on gauge bar display (in thousands) using button, display shows: 1000 to 9990.

Digital Performance Speedometer

SPEEDOMETER (you have three options for speedometer connection)

1.) *Speedometer – White - (Factory sender with Powertrain Control Module)*

All Computer-based engines will need to use to use the PCM/ECM to run the speed signal for the Speedometer. (Consult your factory Pinout Chart)

- When using a LS engine swap, you will need to pick up the Speedometer signal wire from the PCM Pin 50 on the red connector. (This pin may Differ. Refer to your vehicles Pinout Chart for accuracy).

2.) *Speedometer – White - (Factory two wire sender no PCM)* - Most vehicles built after 1984 have an electronic transmission sender. If your vehicle is already equipped with an electronic transmission that does not have a PCM/ECM, then the electronic vehicle sender will usually have Two wires attached to it. One connects to the Signal wire on dash (we prefer this to be high output). The other wire (Low output) Ground at the Engine block. To find High and Low output wire color or pin location will need to be looked up by Vehicle vin or Model and year and Consult your factory Pinout Chart.

3.) *Speedometer - White (Intellitronix Speed Sender to replace factory cable drive)* - Disconnect the mechanical speedometer cable from the transmission and insert the new electronic sensor into the transmission. This panel comes with a 3-wire sensor.

Follow this wiring for the Intellitronix speedometer sending unit:

White -Wire is the speed signal; connect this to the white wire on the sender.

Red/White – Wire is power for the sender will be wired to **Red** wire on your sender.

Black/White - Wire is ground for the sender will be wired to the **Black** wire on the sender.

*If working with a factory VSS or computer based engine you will **NOT** use the **black/white** or **red/white** wires

CALIBRATION

Your electronic dash panel is equipped with our Digital Performance Speedometer, which has factory settings that are ***pre-set with the industry standard setting of 8,000 pulses per mile to match your vehicles factory settings.*** This electronic speedometer displays speed and includes an odometer, trip meter, high speed recall, 0-60 time, and quarter-mile elapsed time. It can be calibrated with the push-button to adjust the speedometer when you have ***different tire sizes, wheel sizes, and gear ratios.***

The single push-button is used by a *quick tap* to toggle between odometer and trip meter. The microprocessor distinguishes between a *quick tap* and a *press and hold* which will reset the trip

meter in trip mode or display performance data in odometer mode.

CALIBRATION

The Digital Performance Speedometer leaves the factory with a factory pre-set industry standard setting of 8,000 pulses per mile. You should ***not have to recalibrate your speedometer, unless you have changed the original tire size or the rear end gear ratio.***

NOTE: DO NOT attempt to recalibrate your speedometer until after it is working properly, and you have determined that the speed is consistently incorrect. The calibration procedure will NOT correct a faulty installation or improper wiring.

WARNING: If, while in 'CAL' mode, **you do not move the vehicle but press the button again**, the microprocessor will NOT have received any data and the unit will display 'Err' and will revert to the factory settings. At a minimum, drive some distance and return to the start if necessary. If you miss stopping the display at 'CAL', simply repeat the steps.

To calibrate:

***if your gauge is in KPH you will need to calibrate to a measured kilometer before speed will register correctly, you will also have to calibrate if you have an S9020**

1. **Locate a measured mile or KPM where you can safely start and stop your vehicle.** By running the vehicle over this measured distance, the speedometer will learn the number of pulses outputted by the speedometer sensor during a specific measured distance. It will then use this acquired data to calibrate itself for accurate reading. There is a small recall pushbutton in the center of the panel used to calibrate and read all of the data stored in the speedometer. After installing your speedometer according to the wiring instructions, when the ignition is on it should immediately display the default screen of 0 MPH, if the vehicle is not moving.

NOTE: You will then need to drive your vehicle to the predetermined measured mile. During this trip, the speedometer should read something other than 0 MPH. If it does not change, return and locate the problem before continuing. Otherwise, proceed with the calibration.

2. Stop at the beginning of the measured mile with your vehicle running and in odometer mode (NOT trip mode), press and hold the push-button until the odometer displays 'HI-SP'. On its own, the gauge will then cycle through the recorded performance in the following order: '0 - 60', '1/4', 'ODO', and 'CAL'.
3. While 'CAL' is displayed, quickly *tap* the push-button once. This will put the speedometer in Program Mode. If you did not tap while 'CAL' is displayed, the pulses per mile will be displayed on the odometer and the display will go back to MPH mode. Otherwise, you will now see 'CAL' displayed along with the number '0'. This indicates that the microprocessor is now ready for calibration.
4. When you are ready, begin driving on the metered mile. You will notice that the reading will start counting up. The odometer will begin to display the incoming pulse count. Drive the vehicle through the measured mile (speed is not important, only the distance traveled).
5. At the end of the mile, stop and press the push-button again. The odometer will now display the new number of speedometer pulses that were registered over the distance. The odometer will continue to display the pulse reading for a few seconds. Once it reverts to the default mode, you have successfully calibrated your speedometer.

Setting the Odometer

While scrolling through 'CAL' mode you will see 'ODO' appear. This will allow you to enter the vehicle's actual mileage. Press the trip button again at this point and you will enter the odometer set up mode. Press quickly to change the number of the digit on the right. Press and hold to advance to the next digit. Do this for all 5 digits.

For Example: To enter the mileage 23456 into the odometer, at the 'ODO' prompt, tap the small black button (quickly) two times, until the number 2 is displayed. Then press and hold the button until the numbers 20 are displayed. Tap the button 3 times until 23 is displayed. Press and hold the button until 230 is displayed and continue in this manner until 23456 is displayed. The speedometer will advance to the home screen, five seconds after the last number is entered.

Recording and Viewing Performance Data

Follow these steps to record and recall Performance Data (high speed, ¼ mile ET, and 0- 60 time):

1. Before each run, your car must be at a complete stop at the starting position. Press and hold the push-button as it cycles through the performance data. At the end, the odometer will reset, and all performance data will be cleared. This will not affect your stored calibration value or the odometer reading.
2. Press the push-button until 'HI-SP' is displayed. The gauge will automatically cycle through the performance data.
3. Start the run, pass, session, etc., as mentioned above.
4. When finished, repeat Step 2 to view the data gathered from the run. While stopped, you can view this data as often as you wish. However, once it finishes scrolling one time, the memory is ready to record new data and will begin recording again once the vehicle starts to move. The highest speed measured over multiple runs will be retained in memory.